













高性能オールラウンド 強力型ローリングマシン

THI-18R,20R,22R,25R,

THREAD ROLLING MACHINE


| | 仕様 | | | | 転造圧 Threads pressure | 出力 Power | 回転数 Speeds | ダイスポケット Standard die pockets | ストローク Standard stroke | ダイスサイズ Standard die | 重量 Weight (net) | タンク容量 Coolant (litros) |
|-----|---|---|---|---|---|---|---|---|--|---|---|---|
| | Threads without points | | | | | | | | | | | |
| | Max | Max | Max | Max | | | | | | | | |
| |  |  |  |  |  |  |  |  |  |  |  |  |
| 18R | M18 | 150 | 50 | 80 | 26,500kg | 4P 22kW | 43 55 70 (3steps) | L W H 284×47×165 320×60×165 | 630 | L W H 280×50×50 310×50×50 | 10ton | 120ℓ |
| 20R | M20 | 180 | 80 | 100 | 27,800kg | 4P 30kW | 37 47 60 (3steps) | L W H 305×62×200 340×65×200 | 680 | L W H 300×60×60 330×60×60 | 13ton | 150ℓ |
| 22R | M22 | 180 | 80 | 100 | 30,800kg | 4P 30kW | 37 47 60 (3steps) | L W H 320×62×200 350×65×200 | 720 | L W H 320×60×60 350×60×60 | 13ton | 150ℓ |
| 25R | M27 | 300 | 80 | 220 | 40,300kg | 4P 45kW | 31 37 44 (3steps) | L W H 403×73×250 470×73×250 | 940 | L W H 400×60×85 450×60×85 | 23ton | 140ℓ |

- モデルチェンジした18R,20R,25R型、新しく追加になった22R。機能、使い易さ共に一層充実した内容でパワーアップ。
- 極太径のネジ転造や太径の同時転造に適した超強力型マシン。
- 2スターター機構採用のため、より一層安定したネジができます。(25R型のみ)




※写真はTHI-25R


外形寸法

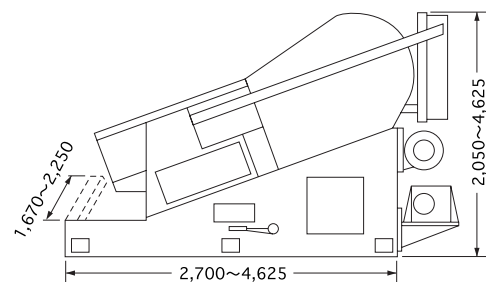


オプション

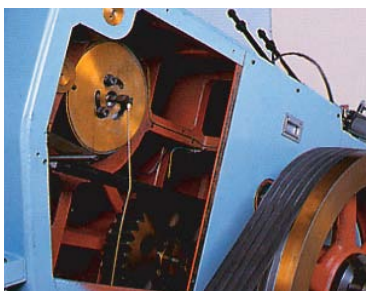

▲駆動カム部

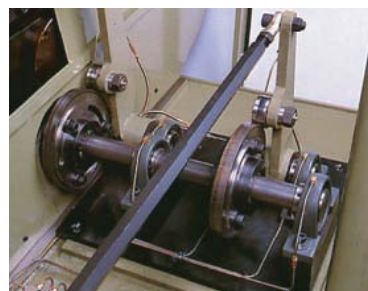

▲2スターターカム(25R型のみ)

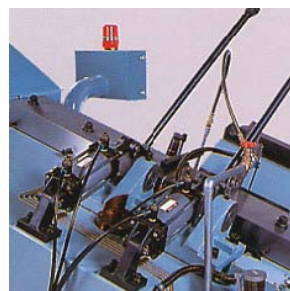

▲テンションバー(オプション)

